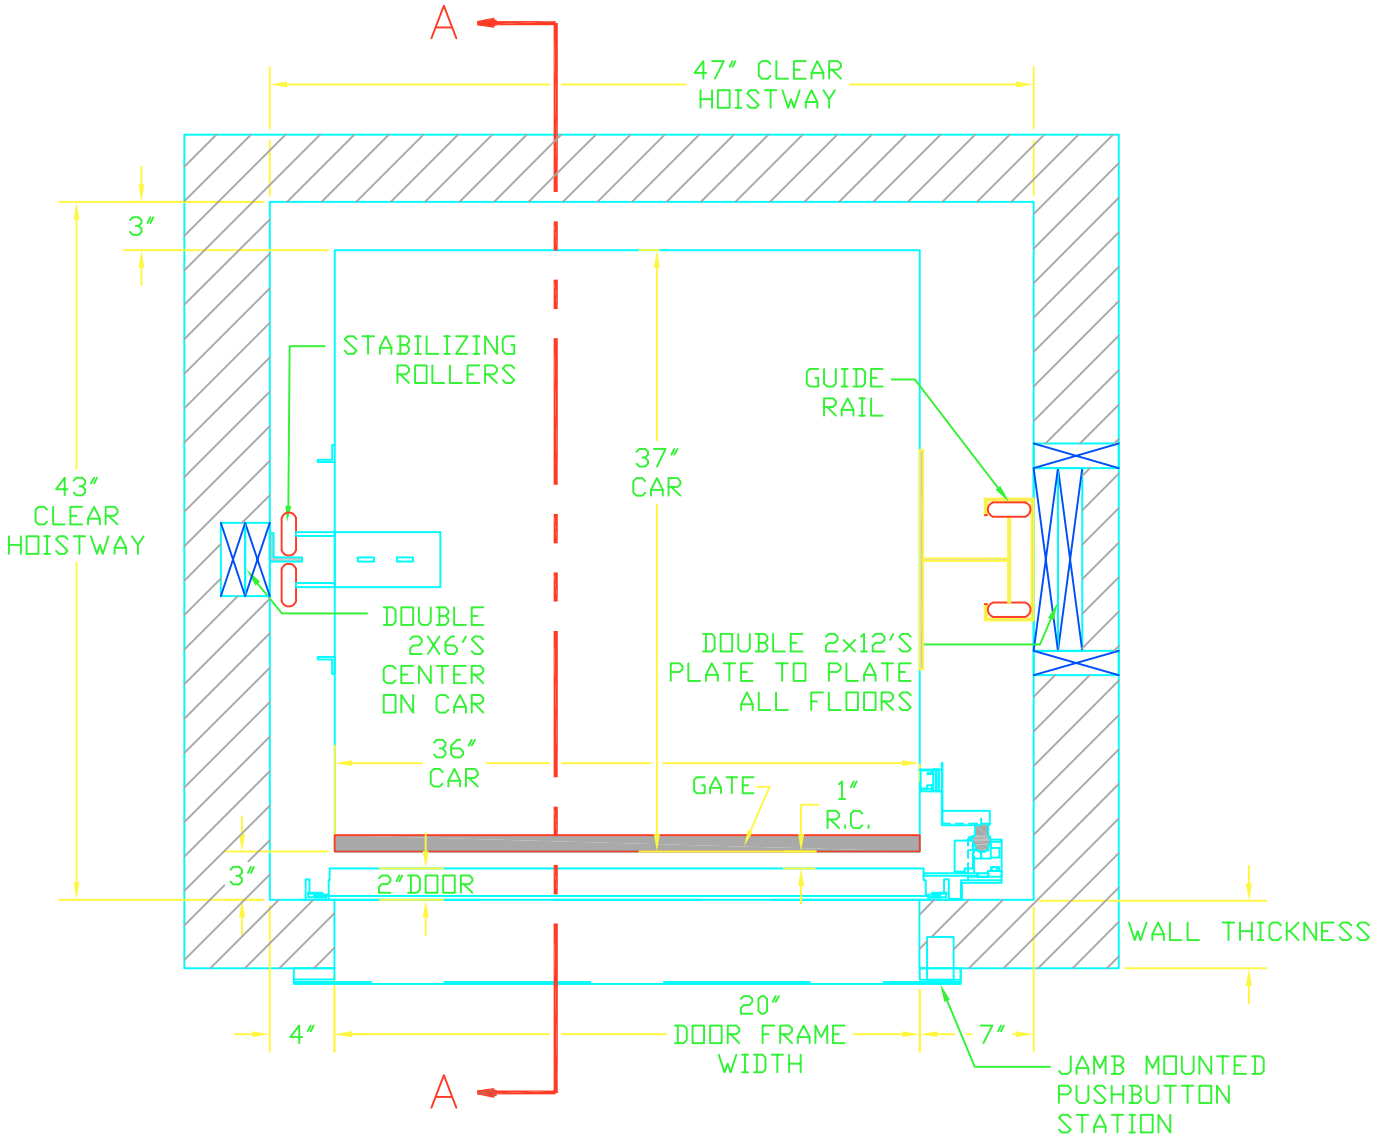

Nationwide Lifts

TITTLE: JEEVES 500 LB. DUMBWAITER

DOORS – BI PARTING
SAME SIDE

REVISIONS

REV	DESCRIPTION	DATE	BY

STOPS: 2 [X] IN-LINE [ ] OPP.
OPENINGS: 2 @ LOWER ,UPPER
TRAVEL: T.B.O.

	[X]	BI-PARTING	[X]	DRYWALL CONSTRUCTION
				MASIONRY CONSTRUCTION
HOISTWAY DOORS		FLOOR LOADING		PLAIN STEEL – PRIMED
	[X]	COUNTER LOADING	[X]	STAINLESS STEEL – #4
	[X]	EMERGENCY RELEASE		

[X] HG-1 SINGLE CONTACT DOOR LOCK & CONTACT NEMA 1
[ ] HG-2 DOUBLE CONTACT INTERLOCK NEMA 1

WALL MOUNTED 24V PUSHBUTTON STATIONS: 3
[X] NON-ILLUMINATED [ ] ILLUMINATED
BUTTONS: [X] 1 [X] 2 [ ] 3 [ ] 4 [ ] 5

CAR GATE		BIRCH WOOD	[X]	ALUMINUM
	[X]	SLIDE-UP	[X]	BY: Nationwide lifts
ACCESS DOOR		PLAIN STEEL		STAINLESS STEEL – #4
		WOOD		BY OTHERS

DUMBWAITER CAN BE INSTALLED THRU ROUGH OPENING HOWEVER INSTALLATION IS EASIER IF THE BOTTOM FLOOR DOOR WALL IS LEFT OFF UNTIL UNIT IS INSTALLED.

HOISTWAY: THE HOISTWAY MUST BE IN ACCORDANCE WITH "SAFETY CODE FOR ELEVATORS AND ESCALATORS" (ASME A17.1) AND ALL STATE AND LOCAL CODES.

PLUMB HOISTWAY: DUE TO CLOSE RUNNING CLEARANCES OWNER/AGENT MUST ENSURE THAT HOISTWAY IS PLUMB, AND SQUARE AND IS IN ACCORDANCE WITH DIMENSIONS ON THESE DRAWINGS.

REINFORCED WALL: THE RAIL WALL MUST BE REINFORCED WITH DOUBLE 2X12 PLANKS AS SHOWN ON THE DRAWINGS. THE MACHINE AND RAIL SYSTEM REQUIRES THESE 2X12 PLANKS FOR SUPPORT.

MACHINE ROOM: MACHINE ROOM MAY BE LOCATED WITHIN THE HOISTWAY ON THE BOTTOM FLOOR OR IN A CLOSET ADJACENT TO THE HOISTWAY (BEHIND THE RAIL WALL). THE MACHINE ROOM MUST HAVE A LOCKABLE ACCESS DOOR. THIS DOOR MUST REMAINED LOCKED AT ALL TIMES.

POWER SUPPLY: A LOCKABLE FUSED DISCONNECT MUST BE PROVIDED IN ACCORDANCE WITH LOCAL ELECTRICAL CODES. THE SUPPLY MUST BE A 220V, 20A DEDICATED CIRCUIT.

DOORS: DOORS MUST MEET LOCAL FIRE CODE. INTERLOCK DEVICES ARE BUILT INTO DOOR

CUSTOMER:	SHIP TO:	APPROVED BY:	OPENING: SAME SIDE	DWG NO. -----
JOB NAME:		DATE APPROVED:	SHEET 1 OF 2	DATE: 10/26/09

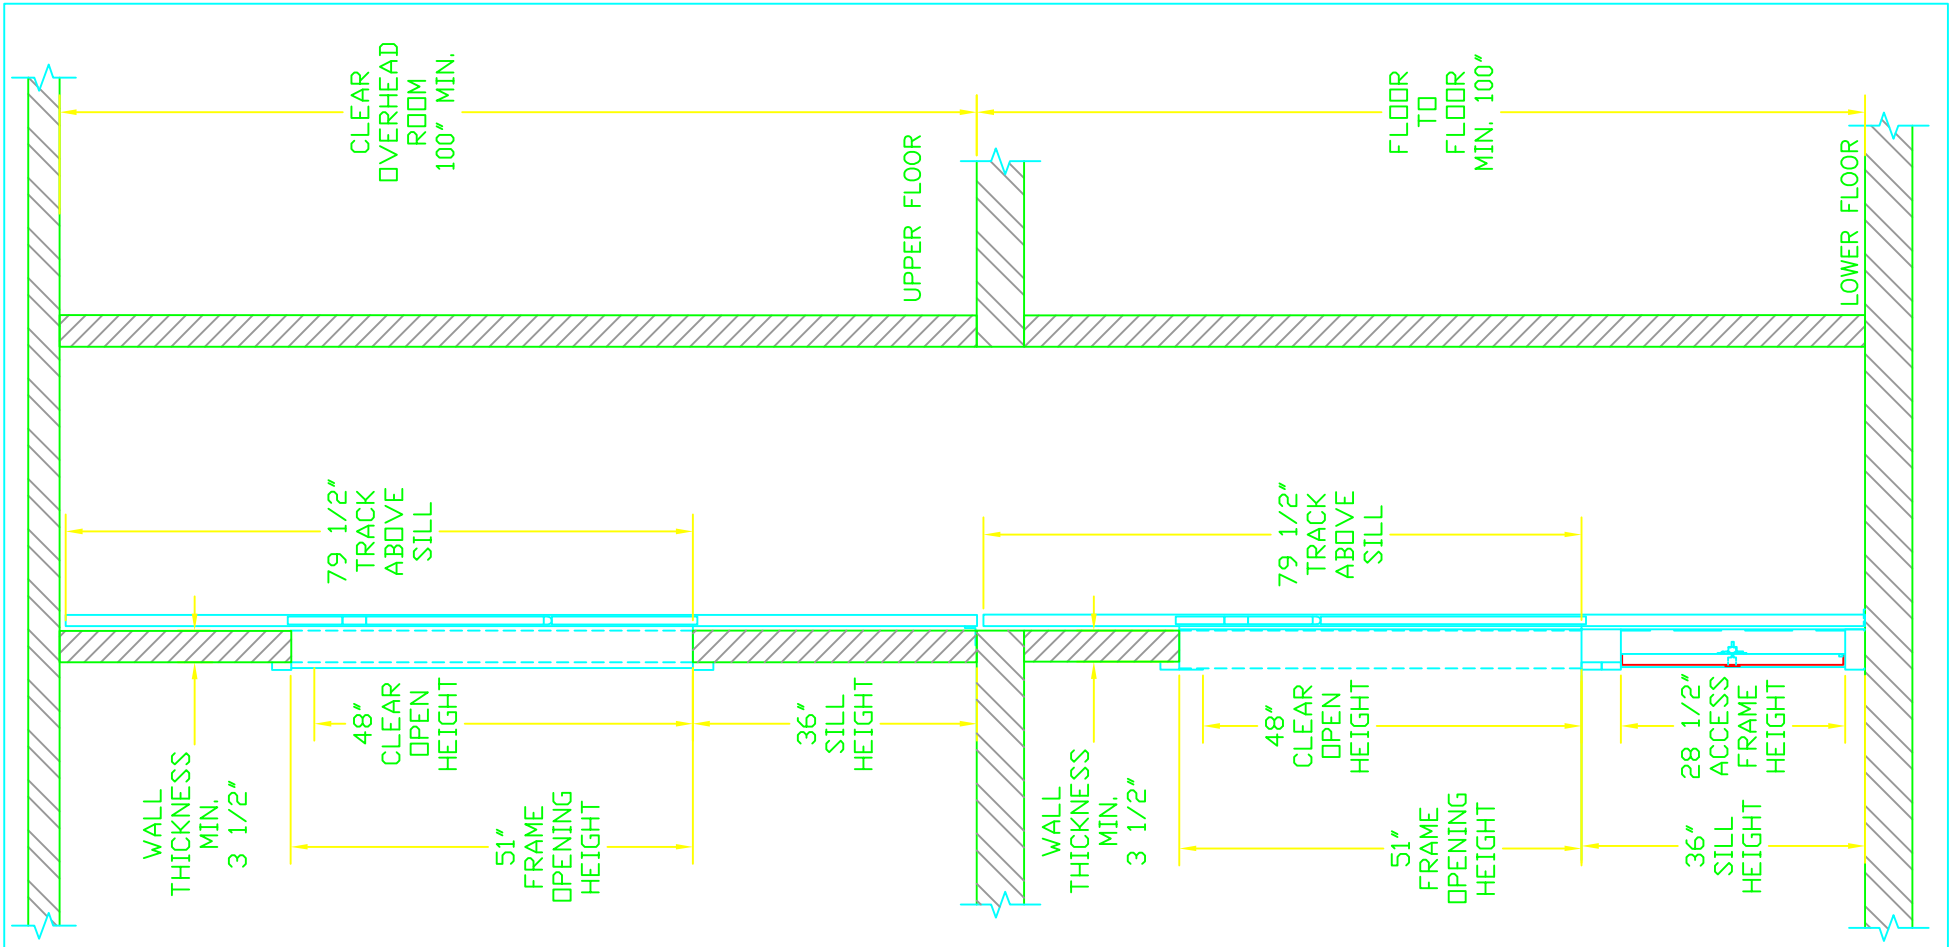

CUSTOMER:	SHIP TO:	APPROVED BY:	TITLE: DUMBWAITER SECTION ELEVATION "A–A"
JOB NAME:		DATE APPROVED:	OPENING: BI–PARTING
			SHEET 2 OF 2
			DWG NO. RST FB2
			DATE: 10/21/09

Nationwide Lifts